







Water Heater

Point of use

O'Pro technology concentrated in a compact and user-friendly water heater


Characteristics

- O'pro technology-Exclusive passive electronic anti-corrosion system to permanently combat rust
- Diamond-quality enamel
- Copper sheathed flange heating element
- Magnesium anode for optimum protection of the tank against corrosion
- Optimised inlet diffuser for the best use of the quantity of hot water
- Compact size water heaters
Safety relief valve provided
- CFC-free high density polyurethane foam insulation

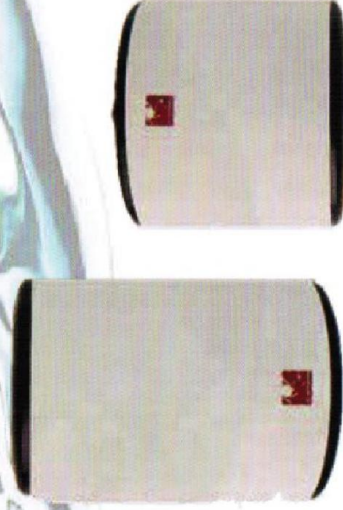

Point of use range

Specifications	Capacity (L)	Output (W)	Voltage (V~)	Heat-up time at 60°C (Δt=20°C)	Heat-up time at 60°C (Δt=50°C)	Energy consumption (kWh/24h at 65°C)
10 above sink 15 compact above sink	1600	1600	230(220/240)	10	24	0.48
	30	2000		14	35	0.58
	50	2000		23	57	0.76
10 under sink 15 compact under sink	2000	2000		38	96	1.13
	2000	2000		8	19	0.63
	2000	2000		11	28	0.66



Earthridge International Ltd

Wholesale Distributors


Dowdstown, Maynooth, Co.Kildare.

Ph. 01-6286711 - Fx: 01-6286509 - email: sales@earthridge.ie


www.earthridge.ie

INSTALLATION OF COMMERCIAL UNVENTED UNDERSINK WATER HEATERS

For inlet water pressure up to 4.1 bar (with no additional kits used)

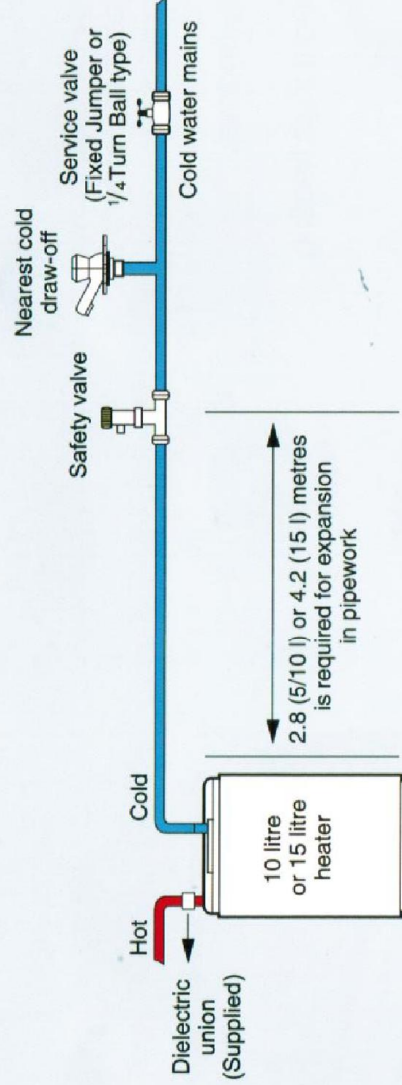

For inlet water pressure up to 4.1 bar where expansion back down the mains is not possible

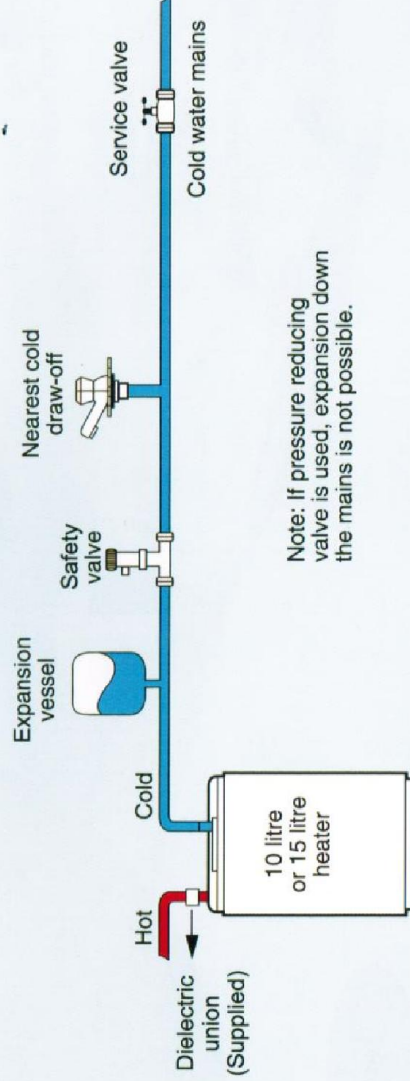

For inlet water pressure above 4.1 bar

