

Omnicare SR Pumped

Thermostatic Electric Shower

Product Codes

Omnicare SR Pumped 8.5kW (Ireland)	XEOSRP81
------------------------------------	----------

Installation

- Silent running pumped electric shower using new digital brushless motor technology
- Retro-fits previous Safeguard pumped electric model
- 2 year guarantee for peace of mind

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Maximum temperature factory set 43°C
- Looped lever handle with low resistance operation
- Constantly regulating water temperature (BEAB Care standard)
- Power on illumination

Flexible Shower Kit

- Extended riser rail – Longer 940mm riser rail with height adjustable shower head holder
- 2m anti-twist hose ideal for seated and standing showering
- Easy clean inclusive 5 spray pattern showerhead with removable spray plate



R N I B
Tried and Tested

Intertek

Intertek

Omnicare SR Pumped

Thermostatic Electric Shower

Shower


Temperature Control	Thermostatic Pumped Electric
Power ratings	8.5kW (230v)
Finish	White & Grey
Energy Rating	A
Sound Power Level	56dB
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on
Water connection	15mm compression
Outlet Connection	½" BSP
Terminal block	16mm ² max cable
Water supply	Mains cold water (Tank fed)
Plumbing System	Cold water cistern only (Gravity fed system)
Water pressure min	1bar (running at 8 l/min)
Water pressure max	10l bar (static)
Minimum Head Pressure	80mm
Maximum Head Pressure	10m
Maximum Static Pressure	1 bar (static)
Water Entry Points	Top, bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (right hand side of unit)
Water Ingress protection	IP25
Approvals, Complies with	BEAB, BEAB CARE, RNIB, CE, BSI Kitemark, Quiet Mark

Diagram Key:

- Water Entry Points
- Cable Entry Points

Dimensions:

- H: 300mm
- W: 316mm
- D: 113mm

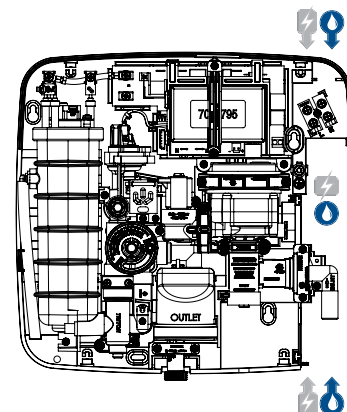

Riser Rail Kit

Extended version

Length	940mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	2m Anti-twist Chrome



Inclusive Extended Shower Riser Rail
TSKINCSTDWC



Care Shower head
(5 Spray Pattern)
TSHECAREWHT



2m Anti-twist Hose - Chrome
TSHG1266

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers/specifiers.co.uk